


# DCNM-DE

www.bo h t . o

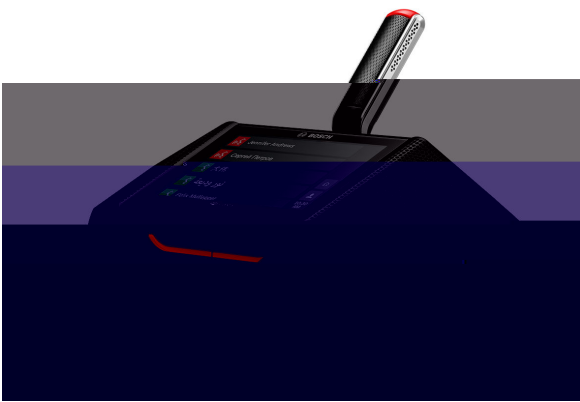

u 4.3

u

u

S

S

S

S

S

4.3

4.3

—

—

—

•

•

•

•

•

•

•

S

•

• 4.3

—

—

•

( )

•

—

• 4.3

•

—

—

•

- 
- 
- 
- 

- 
- 
- 3. 0. 4
- 2 J4
- 

**DCNM-DE DICENTIS**

/	
CE	DECL EC DCNM-DE

**DCNM-DE DICENTIS**

1	DCNM-DE DICENTIS
---	------------------

**DCNM-DE DICENTIS**

	48 VDC
	5 W
	100 Hz – 20 kHz -3 dB
THD	< 0.1 %
	> 90 dB
	> 90 dB

	80 dB	IEC60914
	110 dB	IEC60914

	72 dB	0.5
	87 dB	
	0 dBV	
	3 dBV	
	> 32 ohm < 1k ohm	
	65 mW	

	109.22	4.3
NFC	ISO/IEC14443 A 106 kbps 848 kbps MIFARE 106kbps	

x x	72 x 259 x 139 2.8 x 10.2 x 5.5 (RAL 9017)
-----	--

	1035	2.3
--	------	-----

	5 °C +45 °C 41 °F +113 °F
	-30 °C +70 °C -22 °F +158 °F
	< 90 % > 5%

**DCNM-DE 4.3**

DCNM-DE	S
DCNM-DE	

DCNM-HDMIC	S	S
S		
DCNM-HDMIC		

DCNM-MICS	S	S
S		
DCNM-MICS		

DCNM-MICL	S	S
S		
DCNM-MICL		

DCNM-TC	10	DCNM-xD	
	0	S	0
DCNM-TC			

ACD-MFC-ISO	MIFAREclassic	1kB	50pcs
	2		
ACD-MFC-ISO		0	/

ACD-EV1-ISO MIFARE EV1 8kB 50pcs  
 S 2 V 0 /

ACD-EV1-ISO

---

DCNM-LSSL S S S  
 S  
 SYS  
 DCNM-LSSL

---

DCNM-LSVT S S  
 S S S

---

DCNM-LSVT

---

DCNM-LSID S S S S  
 S S S  
 S  
 DCNM-LSID

---

DCNM-LSDU 2 S S S  
 S S S  
 S  
 DCNM-LSDU

---

:  
 333 203 9  
 20033  
 + 6 2 22  
 + 6 2 22 2099  
 htt :// .bo h t . o  
 400 3 0 669  
 t @ .bo h. o