

SHURE®

LEGENDARY
PERFORMANCE™

ULX-D™





ULX-D™



ULX-D



15

12



Workbench™ 6

Dante™

Wireless

ULX-D



ULX-D



ULX-D

(AES) 256



ULX-D

ULX-D™

ULXD4



ULXD4D




ULXD4Q



- 24, /48 [^]
- 20 ▽ 20 [^]
- 120, [^]
- 60, [^]
-
- 72L
- 8L
- 8L
- 23
- 63
-
-
- A 256
-
- 6
- A 600 A [^]
- AL / [^]
-
- 2
-

- 1 ▽
-
-
-
-

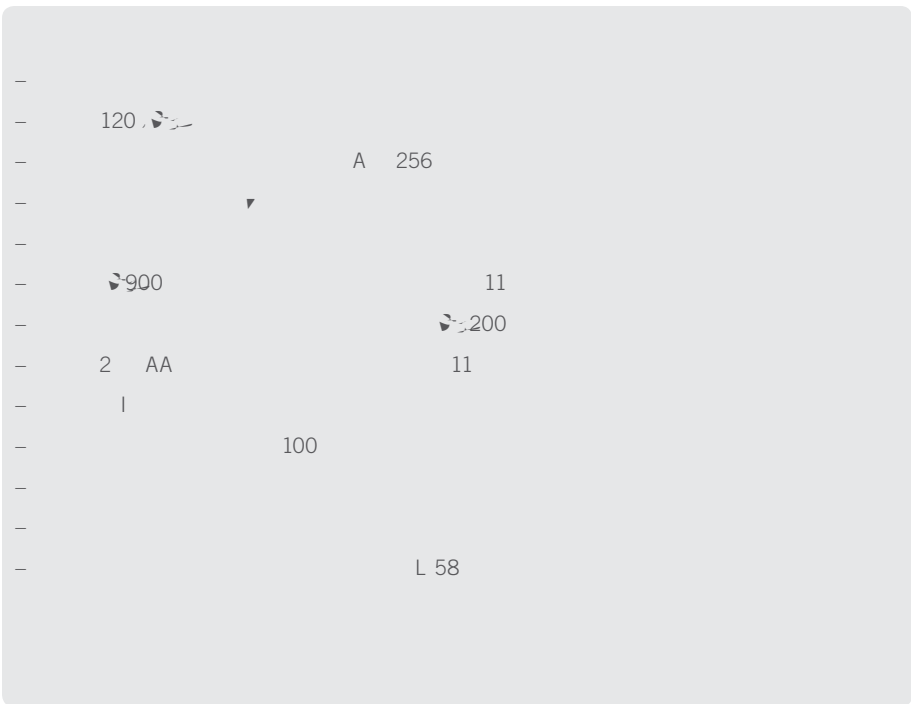




ULX-D™



1mW

- 8MHz
- 125 kHz
- 30 100

63 ULX-D

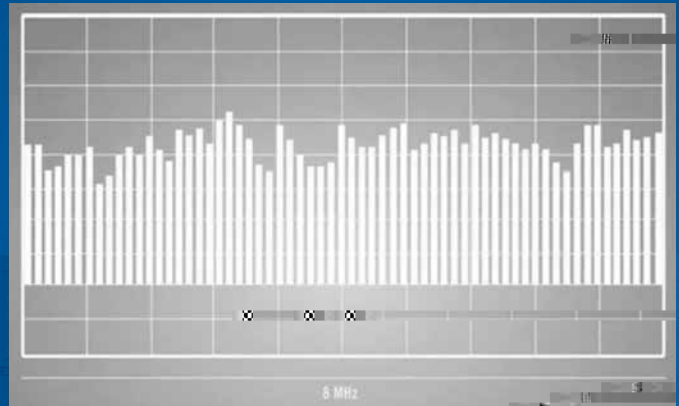

8MHz 63



Dante IP

- Dante
- Dante
- ULXD4D ULXD4Q



ULX-D

- ULXD4D ULXD4Q

470 932 L

>70

<2.9

-98 10^{-5}

100

20 -20⁴

>120 A

@ +10

130 A

<0.1%

12

@ +10

-18 (0) -50 (122)

4 171 197 42
4 4 482 274 44

4 0.9
4 3.36
4 3.45

4 15 @ 0.6 A
4 100 - 240 A 50-60 0.26 A
4 100 - 240 A 50-60 0.32 A

-18 +42 1
/ 4 6.35 +12 4
+18 -12

4 10/100 L
4 4 1

4
4 4

1 86 66 23
2 256 51

1 142
2 340

@ 10 mW

900 11
2 AA 11

11, 1011, 2011

1
2

1 / 4
2