


DCNM-MMD2 DICENTIS

cn.boschsecurity.com

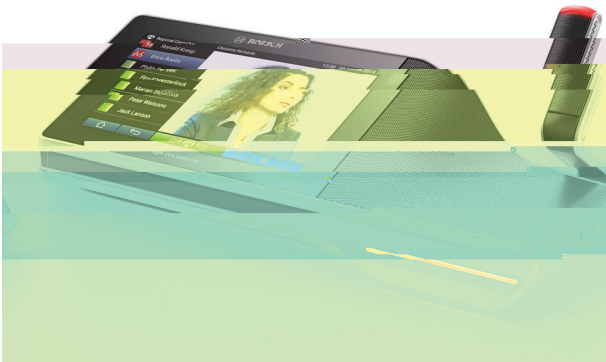

u 7

u (NFC)

u

u

u

/

DICENTIS

DICENTIS

(NFC)
DICENTIS

- (.pdf)
- (.rtf)
- (.txt)

•

- .jpg
- .gif
- .png
- .bmp
- .webp

•

- AAC .3gp .mp4 .m4a
- Flac (.flac)
- Mp3 (.mp3)
- Vorbis (.ogg)
- PCM (.wav)

•

- H263 .3gp .mp4
- H264 .3gp .mp4
- MPEG4 (.3gp)
- vp8 (.webm)

•

• 300

•

•

•

•

•

•

•

•

•

•

•

POE

CAT-5e

• 7

-

-

-

-

-

-

-

-

-

Android

•

- MSWord .doc .docx
- Excel .xls .xlsx
- PowerPoint .ppt .pptx .pps .ppsx

(NFC)

- 2 RJ45
- 3.5
-
-

| | |
|----|-------------------|
| | |
| CE | DECL_CE_DCNM-MMD2 |

| | |
|---|--------------------|
| | |
| 1 | DCNM-MMD2 DICENTIS |

| | |
|--|--|
| | |
|--|--|

| | | |
|-----|---|------------|
| | 7 | 1024 x 600 |
| | Android 4.03 | |
| NFC | ISO/ IEC14443 A 106 kbps 848 kbps MIFARE 106kbps | |

| | | |
|-----|--------------------------|--|
| | 48 Vdc IEEE 802.3 2 | |
| | 12 W | |
| | 100 Hz – 20 kHz -3 dB | |
| THD | < 0.05 % | |
| | 96 dB (14-110 dBSPL) | |
| | 66 dB 30 dB | |

| | | |
|--|---------|----------|
| | 80 dB | IEC60914 |
| | 110 dB | IEC60914 |
| | -38 dBV | |
| | -25 dBV | |

| | | |
|--|-----------|-----|
| | 72 dB SPL | 0.5 |
| | 90 dB SPL | |
| | -9 dBV | |
| | -6 dBV | |

| | | |
|-----|----------------------------------|-------|
| | | |
| x x | 75 x 312 x 175 X 12.28 x 6.89 | 2.95 |
| | 1.85 | 4.078 |
| | RAL 9017 RAL 9022 | |

| | |
|--|--------------------------------|
| | 0 °C +35 °C 32 °F +113 °F |
| | -20 °C +60 °C -4 °F +140 °F |
| | < 90 % > 5% |

| | |
|--|--|
| | |
|--|--|

DICENTIS (NFC) =

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd,
Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia